

BATTERY
CS3



Confidence & Creativity
Service & Sincerity
Belief & Bravery



Superior Cycle Life
Improved Performance
Dependable

EVH

EVH series

EVH-series batteries are specially designed for equipment such as electric cars, bicycles, wheelchairs, golf and shopping carts, etc. A product of intensive R&D, the EVH series is small, lightweight, and suitable for numerous charges. It can be used for more than 400 cycles at 100% discharge, or up to 5 years in standby service. As with all CSB batteries, they are rechargeable, efficient, maintenance-free, leakproof, suitable in any environment and ISO/UL certified.



Performance

- 100% capacity on first discharge.
- Innovative PAM manufacturing technique increases cycle by 150% over standard sealed Pb-acid.
- Uniform plate formation for consistent capacity.
- Hundreds to thousands of recharge cycles (cycle life is based on temperature and depth of discharge).
- No-spill design.
- Maintenance-free.
- Reduced internal resistance for superior performance.

Long service life

- More than 400 cycles at 100% discharge cycle use.
- Up to 5 years expected life under normal float charge conditions at 25 °C (77 °F).
- Extended shelf life (up to 14 months at 20 °C).

Reliability

- CSB-manufactured batteries are 100% 2-cycle tested by CCDS.
- CSB-manufactured batteries are UL-recognized components under UL 924 and UL 1989. CSB file number MH 14533.
- ISO 9001 and 14001 certified.

Applications

Cycle use

- Electric vehicles.
- Golf carts.
- Portable telephone sets.
- Portable lighting equipment.
- Power tools, lawn mowers, vacuum cleaners.
- Portable measuring equipment.
- Camera and photographic equipment.
- Portable VTR/TV, tape recorders and radios.
- Portable personal computers and processors.

Standby use

- UPS.
- Communications and electrical equipment.
- Office computers, microcomputers and other OA equipment.
- Robots, control equipment and other FA equipment.
- Emergency power supply in power generation plants and substations.


Solar Cell Power Generation

- Street lighting.
- Portable power supply.
- Water pumping.
- Rural power systems.











Specifications

Type	Nominal Voltage(V)	Nominal Capacity (20Hr)(Ah)	Weight (Approx. Kg)	Energy Density (wh/L)	Specific Energy (wh/kg)	Internal Resistance Approx. (m Ω)	Max. Discharge Current 5 sec (A)	Dimensions (mm)				Terminal Position	Terminal Type	Max. Charging Current (A)	Charging(V)	
								Height Over Terminal (H)	Container Height (h)	Length (L)	Width (W)				Standby Use	Cycle Use
EVH12150	12	15	4.50	129.4	40.00	11.00	180	102.0 \pm 1.0	94.0 \pm 1.0	151.0 \pm 2.0	98.0 \pm 1.0	e	F2 / I3	4.50	2.275V \pm 0.025/CELL AT 25 $^{\circ}$ C (77 $^{\circ}$ F) Temp Coefficient -3.3mV/CELL $^{\circ}$ C	2.45V \pm 0.05V/CELL AT 25 $^{\circ}$ C (77 $^{\circ}$ F) Temp Coefficient -5mV/CELL $^{\circ}$ C
EVH12390	12	39	11.50	118.9	40.70	8.00	400	178.3 \pm 2.0	154.8 \pm 2.0	195.6 \pm 2.0	130.0 \pm 1.5	c	B5	11.70		


Terminal Position

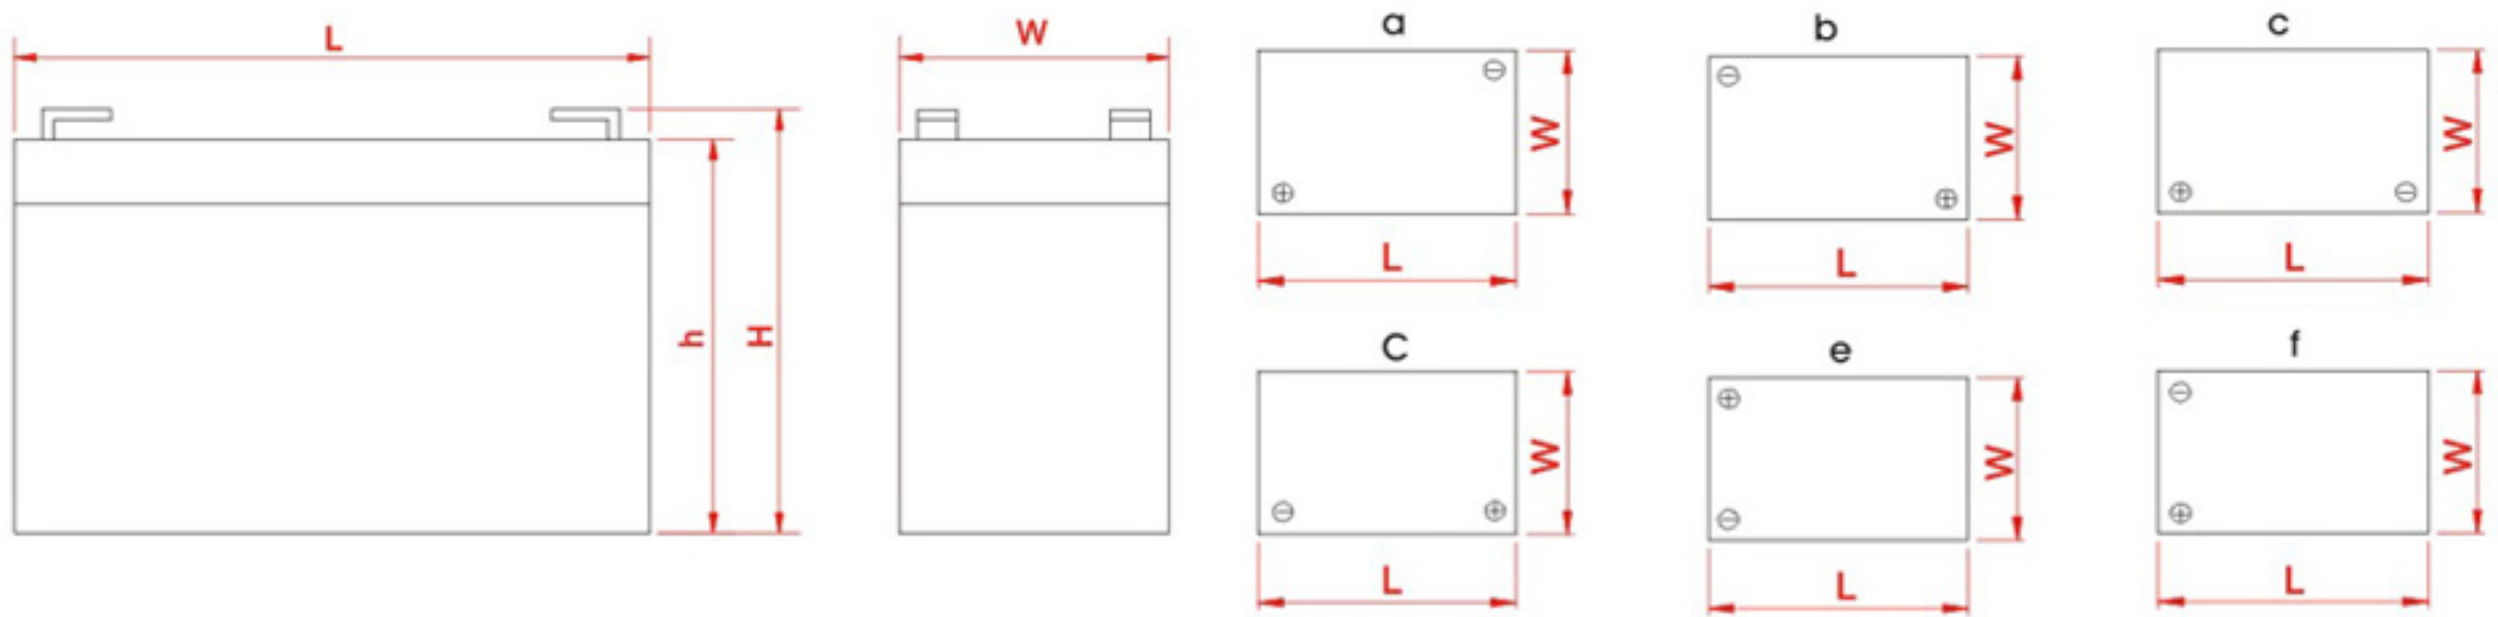


Terminal Type

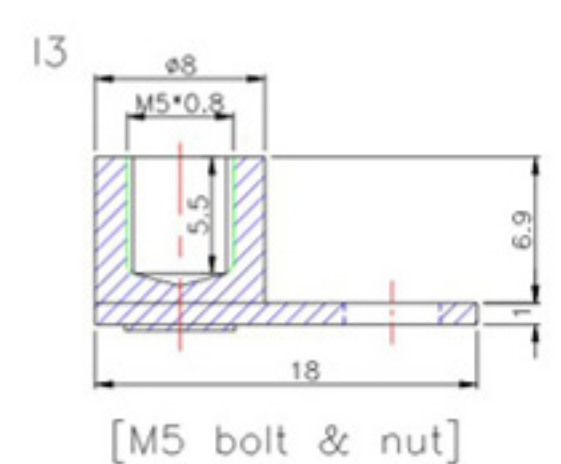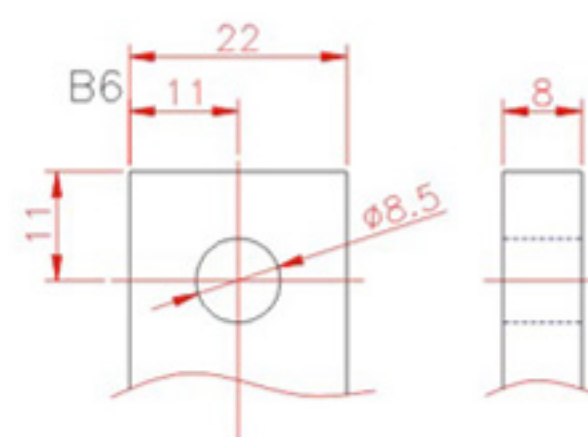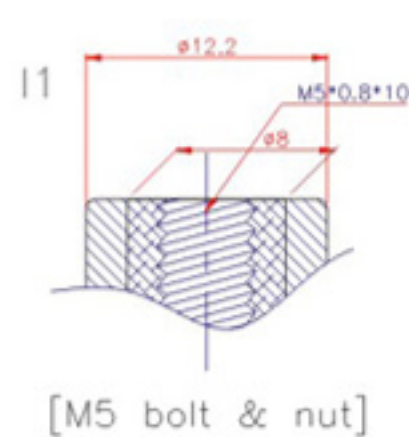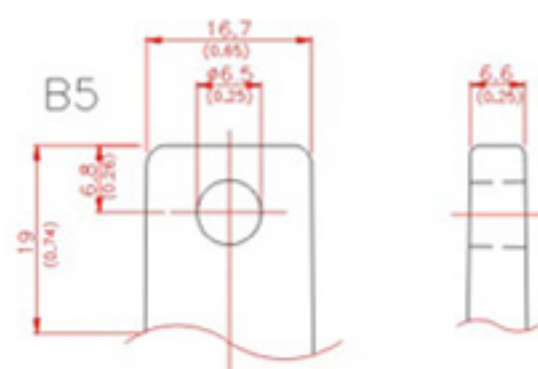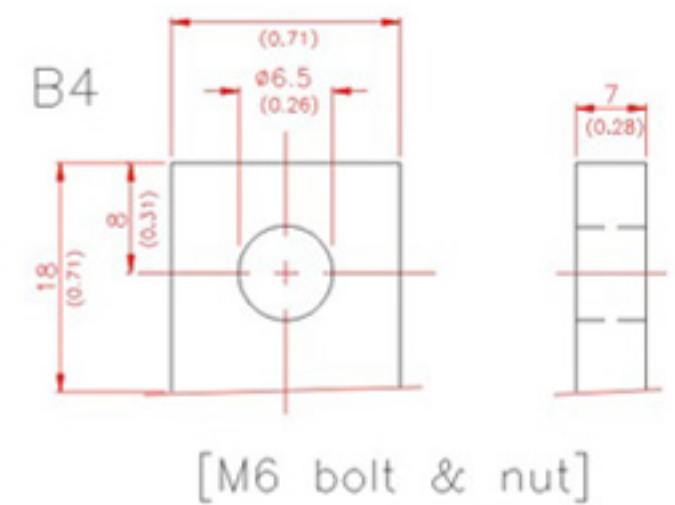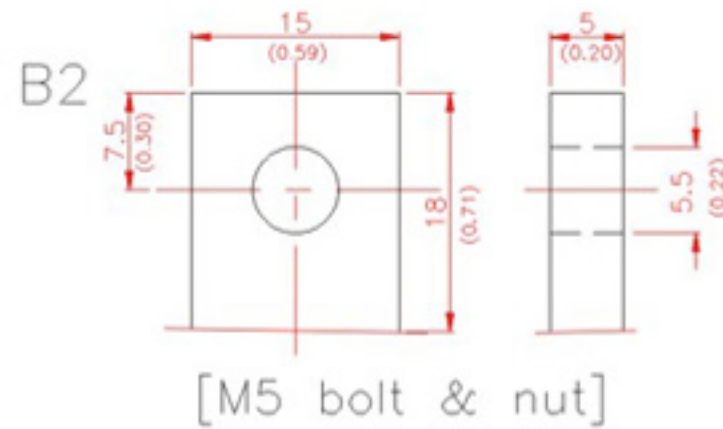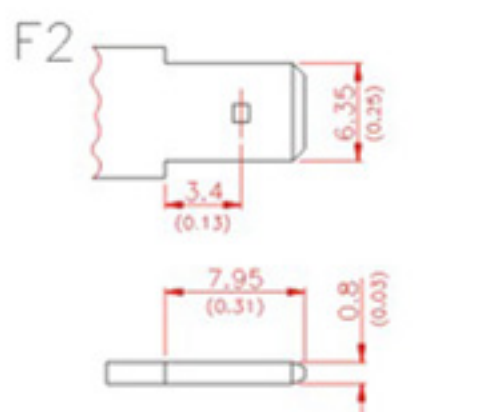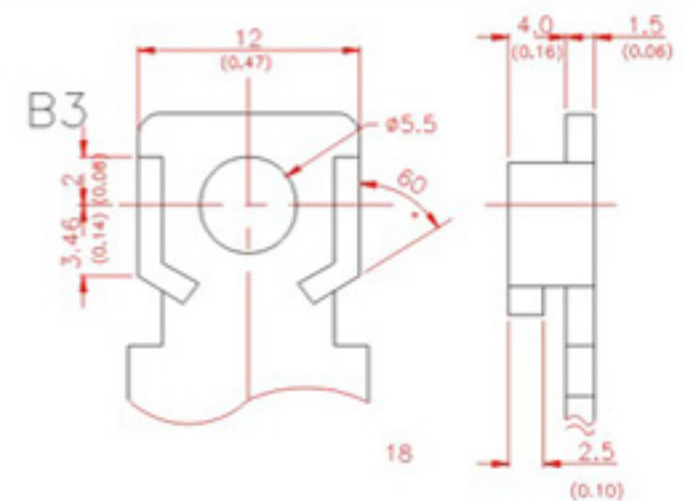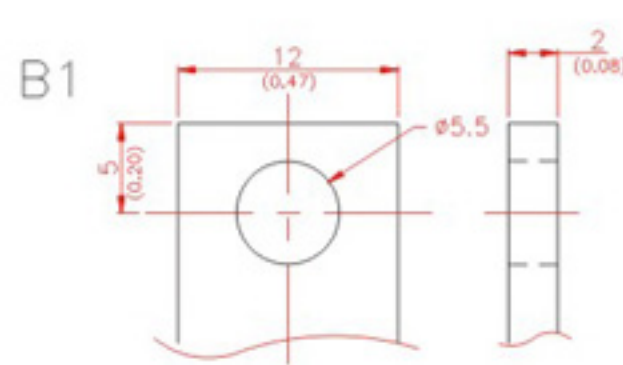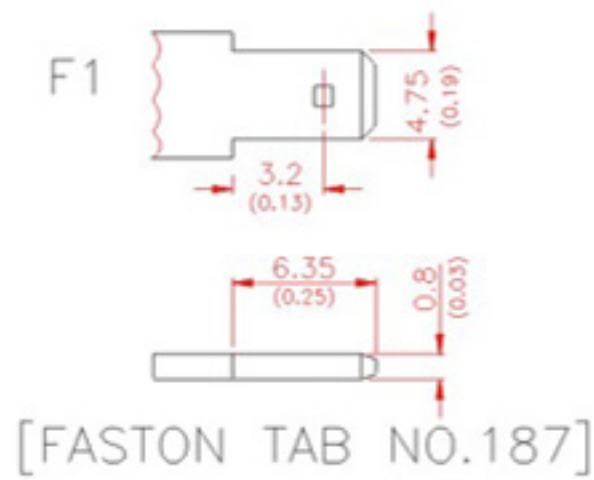


Trickle (or Float) Service Life

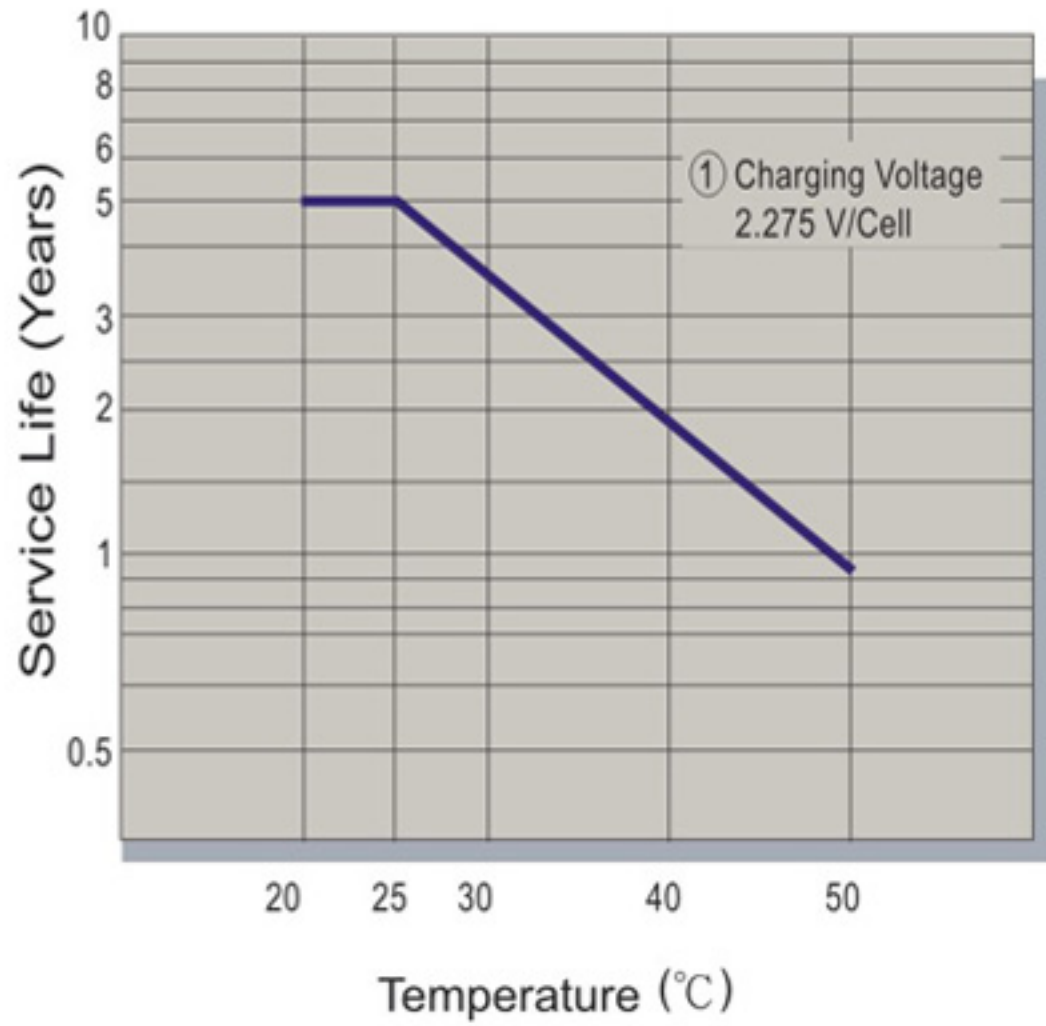


Capacity Retention Characteristic

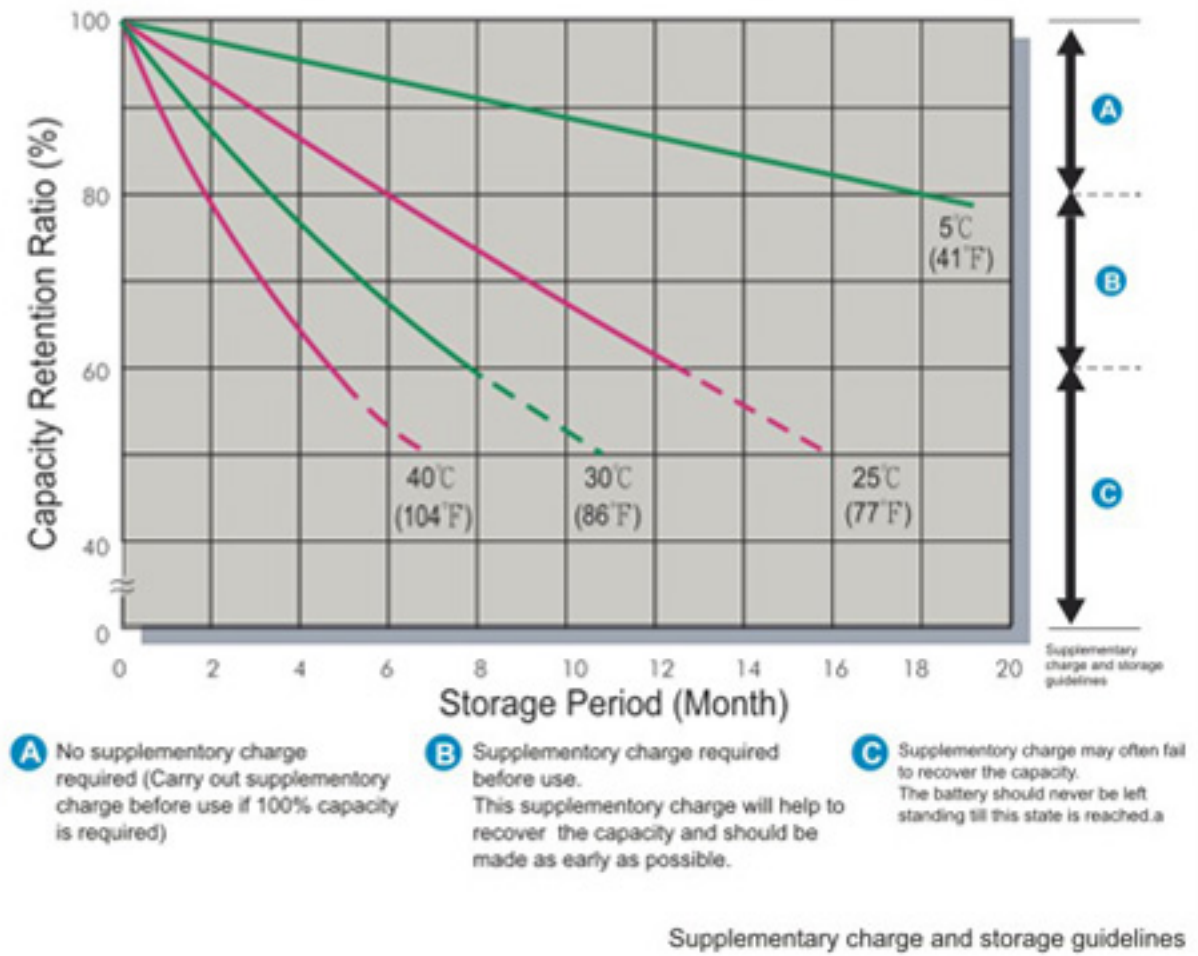


Battery Voltage and Charge Time for Standby Use

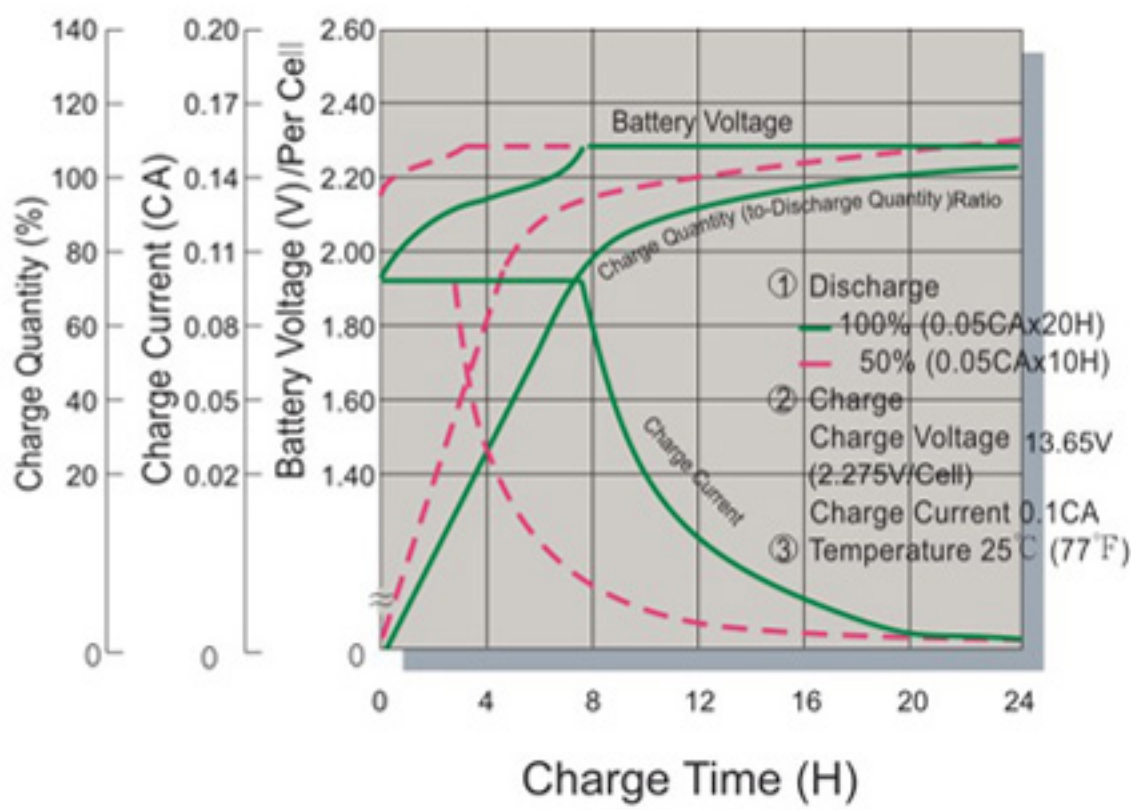


Cycle Service Life

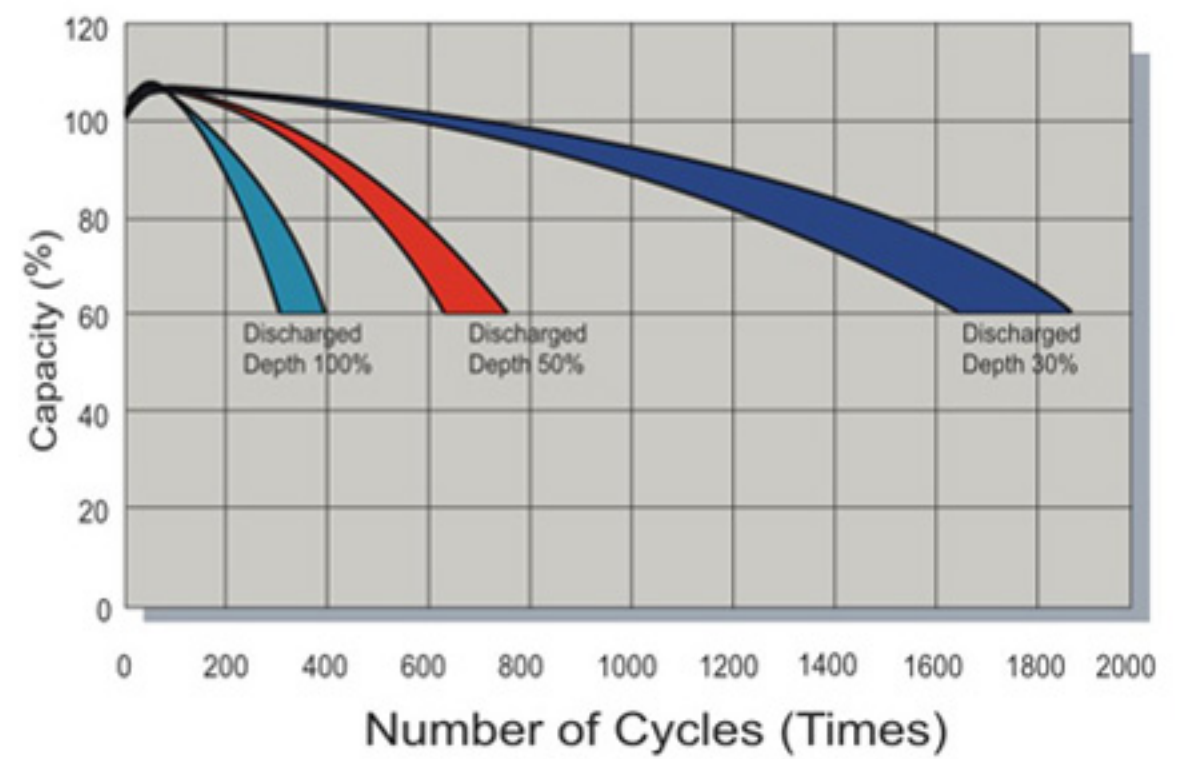

Battery Voltage and Charge Time for Cycle Use

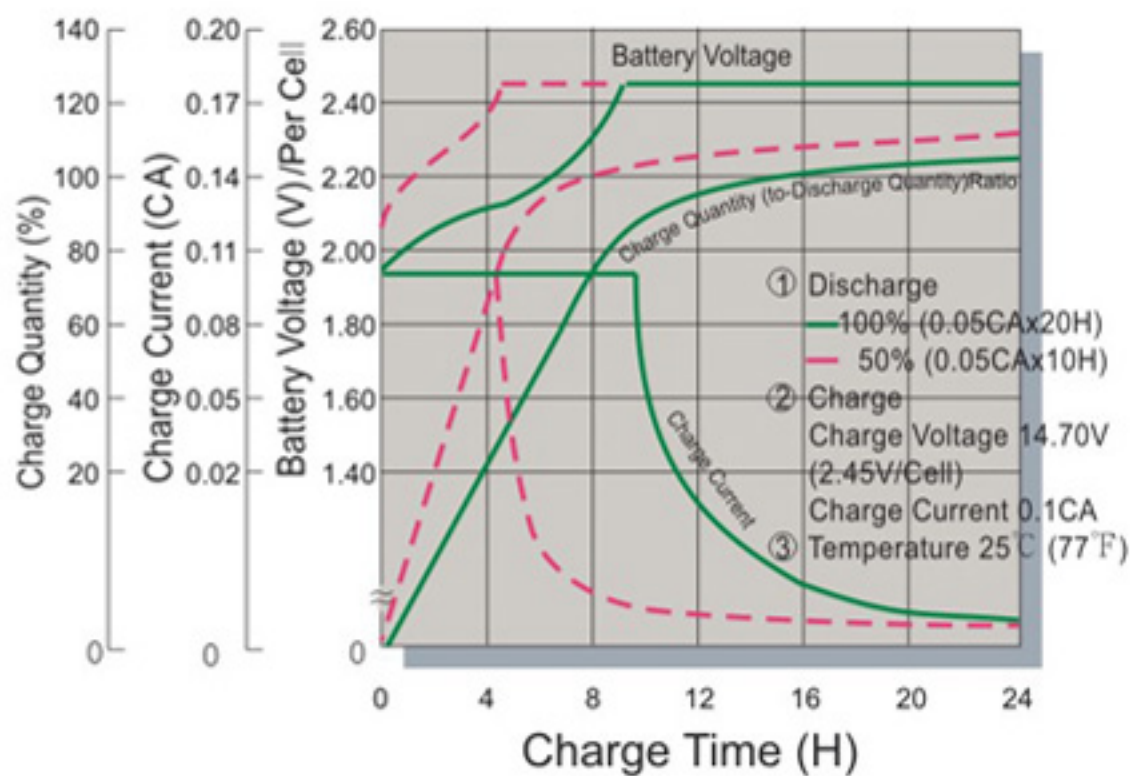

Terminal Voltage (V) and Discharge Time

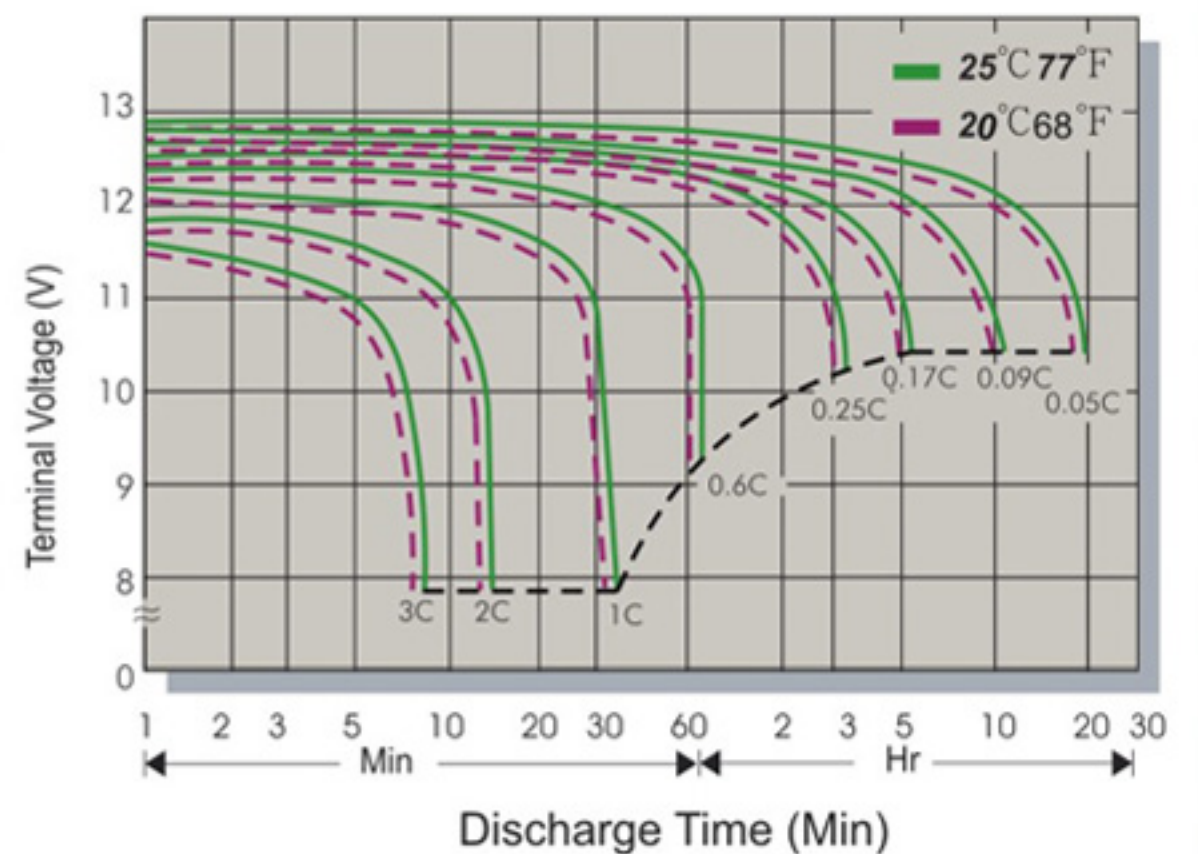

EVH12150

Constant Current Discharge Characteristics Unit:Amperes(25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	34.0	19.5	11.2	7.85	6.18	4.33	2.72	1.75	1.43	0.780
1.67V	33.3	19.3	11.0	7.79	6.11	4.25	2.68	1.73	1.41	0.770
1.70V	32.6	19.0	10.9	7.70	6.02	4.18	2.64	1.70	1.39	0.760
1.75V	31.7	18.7	10.7	7.60	5.93	4.10	2.59	1.67	1.37	0.750
1.80V	30.8	18.5	10.6	7.50	5.83	4.02	2.54	1.64	1.34	0.740
1.85V	29.7	18.1	10.4	7.38	5.72	3.94	2.49	1.61	1.32	0.710

Constant Power Discharge Characteristics Unit:Watts(25°C, 77°F)

F.V/Time	15MIN	30MIN	60MIN	90MIN	2HR	3HR	5HR	8HR	10HR	20HR
1.60V	367	213	123	88.0	68.0	48.1	30.5	19.8	16.2	8.21
1.67V	360	210	120	86.0	67.1	47.3	30.0	19.5	16.0	8.15
1.70V	351	207	118	84.0	65.9	46.5	29.6	19.2	15.7	8.09
1.75V	343	203	115	82.0	64.7	45.6	29.1	18.9	15.5	8.01
1.80V	333	199	113	80.0	63.2	44.8	28.6	18.6	15.2	7.92
1.85V	323	192	111	78.0	61.8	43.9	28.0	18.2	14.9	7.82

EVH12390

Constant Current Discharge Characteristics Unit:Amperes(25°C, 77°F)

F.V/Time	30MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	39.6	23.3	17.8	14.4	10.4	8.25	6.93	4.68	3.89	2.13
1.67V	38.5	22.9	17.5	14.2	10.3	8.19	6.87	4.60	3.81	2.06
1.70V	37.4	22.4	17.2	14.0	10.2	8.13	6.79	4.53	3.73	2.01
1.75V	36.4	22.0	16.8	13.7	10.1	8.04	6.71	4.46	3.67	1.96
1.80V	35.4	21.6	16.6	13.5	9.93	7.94	6.62	4.40	3.60	1.91
1.85V	34.3	21.1	16.2	13.3	9.78	7.80	6.52	4.33	3.54	1.87

Constant Power Discharge Characteristics Unit:Watts(25°C, 77°F)

F.V/Time	30MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	475	280	213	172	124	99.0	83.2	56.2	46.6	25.5
1.67V	463	276	210	170	123	98.1	82.4	55.3	45.6	24.8
1.70V	451	271	207	168	122	97.2	81.5	54.4	44.8	24.1
1.75V	438	265	204	166	120	96.2	80.5	53.6	44.0	23.5
1.80V	425	260	201	163	119	95.0	79.4	52.8	43.3	22.9
1.85V	412	253	197	160	117	93.7	78.2	52.0	42.6	22.4

All information are suggest to change without notification. Please consult CSB website (www.csb-battery.com) for latest information.



WAY TO THE
FUTURE CSB WITH YOU

BATTERY



SALES OFFICE

TAIWAN OFFICE

CSB BATTERY CO., LTD.
5F.-1, No.36, Nanjing W. Rd.,
Datong District,
Taipei City 10352 ,
Taiwan (R.O.C.),
Tel: +886-2-2555-5600
Fax: +886-2-2555-3300
E-mail: service@csb-battery.com.tw

USA OFFICE

CSB BATTERY TECHNOLOGIES, INC.
2901, White Settlement Rd.
Ft. Worth TX 76107.
U.S.A.
Tel: +1-817-244-7777/1-(800)3
CSBUSA(272872)
Fax: +1-817-244-4445
E-mail: csb@csb-battery.com

EUROPE OFFICE

CSB BATTERY OF NETHERLANDS B.V
Ridderhaven 32
2984BT Ridderkerk
The Netherlands
Tel: +31 (0) 180 418 140
Fax: +31 (0) 180 418 327
E-mail: eurosales@csb-battery.com

BEIJING OFFICE

CSB BATTERY TECHNOLOGIES (BEIJING) CO., LTD.
2th Fl. 7G, Future Business Center, Chaoyang
North Rd., Chaoyang District
Beijing, China
Zipcode: 100024
Tel: +86-10-5962-1300 / 1301 / 1302 / 1303
Fax: +86-10-5962-1304
E-mail: chinasl@csb-battery.com

SHANGHAI OFFICE

CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.
Sec. A, 3Fl., No.6 Building, No.350, Xiya Rd.,
Shanghai Waigaoqiao Trade Zone.
Shanghai, China
Zipcode: 200131
Tel: +86-21-5046-1622, 5046-0833
Fax: +86-21-5064-3314
E-mail: chinasl@csb-battery.com.tw

SHENZHEN OFFICE

CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.
Room 2103-2105, Block East,
City Professional Hub, Shennan Avenue, Futian
Shenzhen, China
Zipcode: 518053
Tel : + 86-755-2694-2788/2606/2706
Fax: + 86-755-2694-2748
E-mail: she@csb-battery.com.tw

MANUFACTURING SITE

GUANGZHOU FACTORY

CSB BATTERY GUANGZHOU CO., LTD.
No 97, Tianyuan Road, Yonghe Area,
Guangzhou Economic Technology Development
Zone, P.R.C.
Postcode: 511356
Tel : +86-20-8297-9716
Fax : +86-20-8297-9719

GUAN TYAN FACTORY

CSB GUAN TYAN FACTORY (TAIWAN)
No. 16, Gong Yeh West Rd., Ell Jenn Tsuen,
Guan Tyan Hsiang, Tainan Hsien,
Taiwan.
Tel : +886-6-698-7600
Fax : +886-6-698-5734